

DURIRON

Serial No. 302760, 761, 762

DURCO

CUSTOMER ORDER NO. 52-60126-XMS	DATE QUOTED 1/22/86	ITEM NO. FOR NAMEPLATE MA-830A/B/C	QUANTITY 3	DATE REQ'D.	MFR. ORDER NO. WCP 11931	PAGE 1
CUSTOMER Velsicol Chemical		LIQUID PUMPED & % CONC Water		OF 13		

DESTINATION
Beaumont, TX

PUMP SERIES & ALLOY
8x6-14A/136 DCI

CASING ALLOY **DCI**

TAP I **1/2" NPT** TAP II

TAP III TAP IV

JACKET: FULL ☐ PART ☐ THERM ☐

OTHER **1/2" drain plug - SR**

REAR COVER ALLOY **DCI**

TAP V TAP VI TAP VII

JACKET: S. BOX ☐ RCP ☐ THERMONIZED ☐

GASKET

IN LINE SBA #

IMPELLER ALLOY **DCI**

SPEC. GASKET ☐

SEALMATIC REPELLER ALLOY

SIZE TYPE RPM

SHAFT **BB (CS)**

HOOK SLEEVE

BEARING HSG ADAPTER ALLOY **CI**

BEARING HOUSING ALLOY **CI**

COOLED ☐ OIL MIST ☐ GREASE ☐

SEALED ☐ SWINGAWAY FOOT ☐

OTHER

BASE NO. **58** MAT. **fab. steel**

304 SS BASIN ☐ DRIP LIP ☐

STILT ☐ STILT ALLOY

OTHER

CPLG. MFR. **Woods** SIZE **SC8H**

NON-SPACER ☐ SPACER ☒

CPLG. GUARD ☒ MAT. **Steel**

BYPASS LINE TAP TO TAP

STD. TFE

API PLAN MAT.

PIPE ☐ TUBING ☐ SIZE

SPECIAL PAINT ☐

TESTS WIT. NON WIT.


HYDRO (PARTS ONLY) ☐ ☐

PERFORMANCE ☐ ☐


NPSH ☐ ☐

CERTIFIED NOISE LEVEL ☐ ☐


MARK II DURCOPUMPS



STANDARD



SELF-PRIMING



SUPERCHLOR



MARK II DSU
CANNED PUMP



SEALMATIC

DURCO PUMPS
ARE DESIGNED
TO SAVE YOU \$

% SOLIDS & DESCRIPTION	
TEMP./SUCTION PRESS	80°F
S.G./VISCOSITY (CP)	1.0
PERFORMANCE GPM	1500
TDH-REQ'D./OFF'D. (FT)	70.0 / 70.0
NPSH-Avail/REQ'D. (FT)	? / 7.0
BHP-OP. COND./MAX.	31.0 / 36.0
CURVE NUMBER	M II 8327CV
IMPELLER DIA. OFF'D./MAX.	13-3/4" / 14"

STUFFING BOX: STD. ☐ OVERSIZE ☐

FOR BUT LESS SEAL ☐ AND/OR TEMPORARY LIP SEAL ☐

PACKED: STD. ☐ SPECIAL

SEAL MFR. **Dura** TYPE **X100**

CODE **IR2EE/VV**

INTX ☐ EXT ☐ MTD ☒ UN-MTD ☐

SEAL RING	Carbon	SINGLE OR INNER	DOUBLE OUTER
SEAT	Silicon Car.		
SEAT MTG.	O Ring		
SHAFT PKG.	TFE Encapsul.		
METAL PARTS	Hast.C		
SET SCREW & SPRINGS	Hast.C		
GLAND/F. FLG. ALLOY	316SS	BY Dura	
FLUSH ☒ V & D ☐ WITH		BUSHING	
OTHER SPECIALS			
SEAT PINNED HORIZ. ☐ VERT. ☐ ANGLE ☐			
THROTTLE BUSHING IN BOX			
LIP SEAL IN BOX			

DURCO MARK II
IN-LINE



DRIVER DATA

MOTOR ☒ TURB. ☐ OTHER

HP RPM **40.0** **1150** FRAME **324T** TYPE **TEFC**

PH HZ VOLTS **3/60/450** MFR. **Reliance**

SPECIAL **XT (chem.duty)**

TAG OR MARK

FURN. BY CUST. ☐ MTD. BY CUST. ☐


DURCO ☒ DURCO ☒

RECEIVED

22 25 86


VELSICOL CHEMICAL CORP.
CORPORATE ENGINEERING

GENUINE DURCO PARTS
QUALITY - AVAILABILITY - VALUE

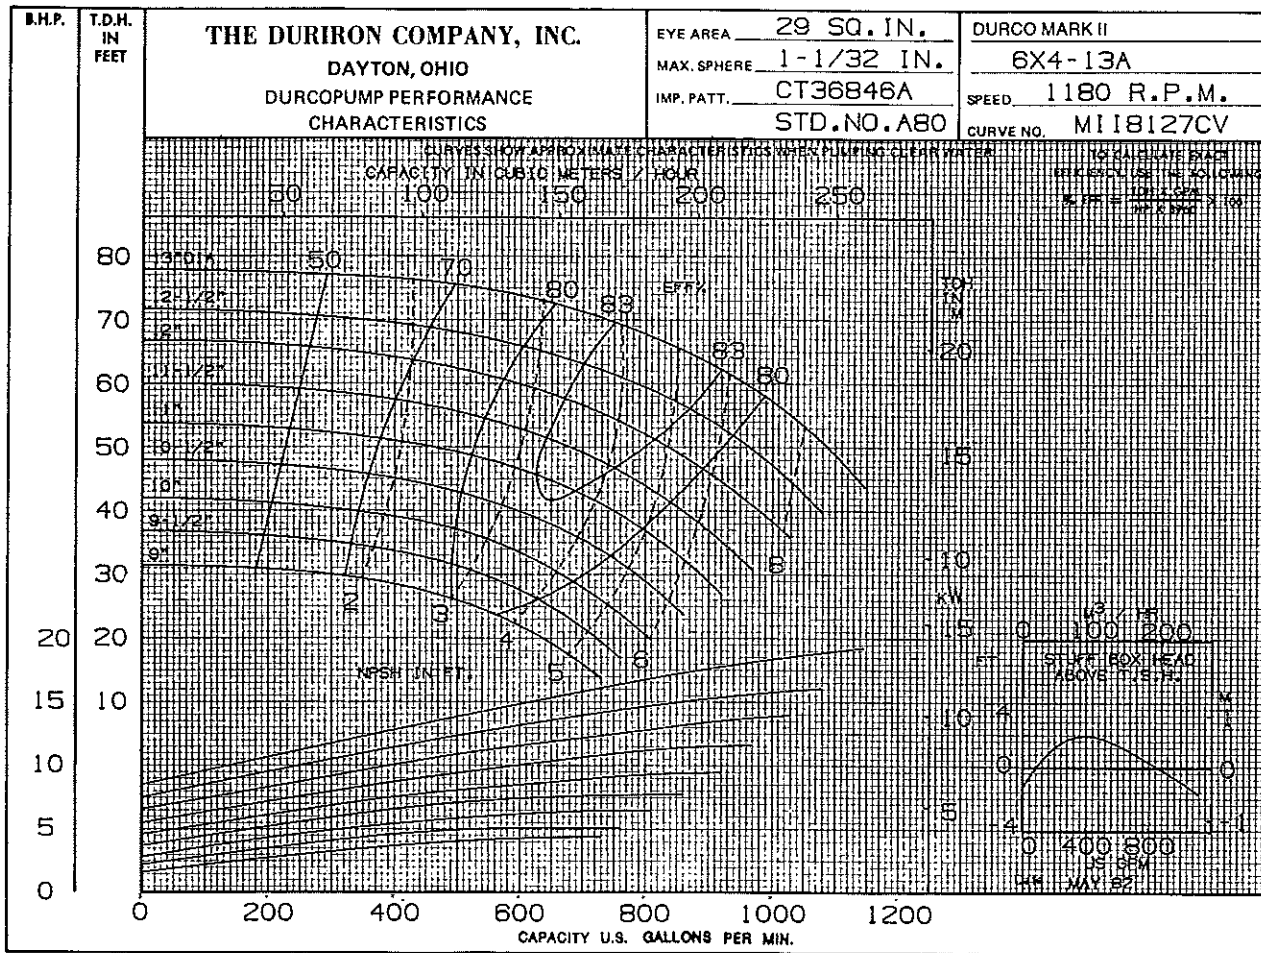

Form No. 62-2561

MA-830 A/B/C

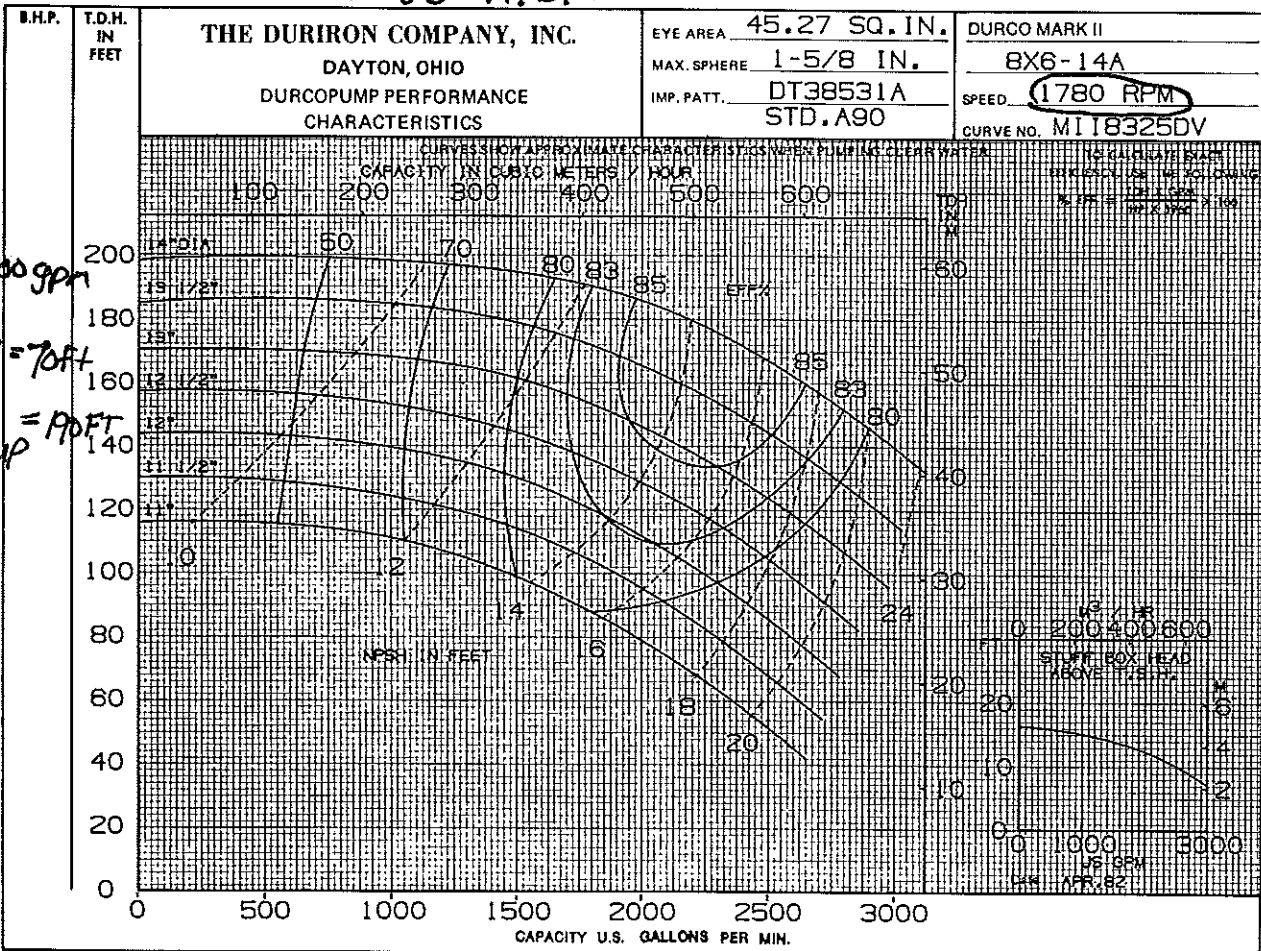

Form No. 62-2561

Flow 1500 gpm
TDH
Data Sheet = 70 ft
Actual
13 3/4" IMP = 190 ft