

DURIRON

Serial No. 302760, 761, 762

DURCO

CUSTOMER ORDER NO.

QUOTE NO.

DATE QUOTED

DATE REQ'D.

52-60126-XMS

1/22/86

ITEM NO. FOR NAMEPLATE

MA-830A/B/C

QUANTITY

3

MFR. ORDER NO.

WCP 11931

PAGE

1

OF 13

CUSTOMER

Velsicol Chemical

DESTINATION

Beaumont, TX

PUMP SERIES & ALLOY

8x6-14A/136

DCI

CASING ALLOY

DCI

TAP I 1/2" NPT TAP II

TAP III TAP IV

JACKET: FULL ☐ PART ☐ THERM ☐

OTHER 1/2" drain plug - SR

REAR COVER ALLOY DCI

TAP V TAP VI TAP VII

JACKET: S. BOX ☐ RCP ☐ THERMONIZED ☐

GASKET

IN LINE SBA #

IMPELLER ALLOY DCI

SPEC. GASKET ☐

SEALMATIC REPELLER ALLOY

SIZE TYPE RPM

SHAFT BB (CS)

HOOK SLEEVE

BEARING HSG ADAPTER ALLOY CI

BEARING HOUSING ALLOY CI

COOLED ☐ OIL MIST ☐ GREASE ☐SEALED ☐ SWINGAWAY FOOT ☐

OTHER

BASE NO. 58 MAT. fab. steel

304 SS BASIN ☐ DRIP LIP ☐STILT ☐ STILT ALLOY

OTHER

CPLG. MFR. Woods SIZE SC8H

NON-SPACER ☐ SPACER ☒CPLG. GUARD ☒ MAT. Steel

BYPASS LINE TAP TO TAP

STD. TFE

API PLAN MAT.

PIPE ☐ TUBING ☐ SIZESPECIAL PAINT ☐

TESTS

WIT.

NON WIT.


HYDRO (PARTS ONLY)

PERFORMANCE


NPSH

CERTIFIED NOISE LEVEL


MARK II DURCOPUMPS



STANDARD



SELF-PRIMING



SUPERCHLOR

MARK II DSU
CANNED PUMP

SEALMATIC

DURCO PUMPS
ARE DESIGNED
TO SAVE YOU \$

LIQUID PUMPED & % CONC

Water

% SOLIDS & DESCRIPTION

TEMP./SUCTION PRESS

80°F

S.G./VISCOSITY (CP)

1.0

PERFORMANCE GPM

1500

TDH-REQ'D./OFF'D. (FT)

70.0

70.0

NPSH-Avail/REQ'D. (FT)

7

7.0

BHP-OP. COND./MAX.

31.0

36.0

CURVE NUMBER

M II 8327CV

IMPELLER DIA. OFF'D./MAX.

13-3/4"

14"

STUFFING BOX: STD. ☐ OVERSIZE ☐FOR BUT LESS SEAL ☐ AND/OR TEMPORARY LIP SEAL ☐PACKED: STD. ☐ SPECIAL

SEAL MFR. Dura

TYPE X100

CODE IR2EE/VV

INTX ☐ EXT ☐MTD ☒ UN-MTD ☐

SEAL RING

Carbon

SEAT

Silicon Car.

SEAT MTG.

O Ring

SHAFT PKG.

TFE Encapsul.

METAL PARTS

Hast.C

SET SCREW & SPRINGS

Hast.C

GLAND/F. FLG. ALLOY 316SS BY Dura

FLUSH ☒ V & D ☐ WITH

BUSHING

OTHER SPECIALS

SEAT PINNED HORIZ. ☐ VERT. ☐ ANGLE ☐

THROTTLE BUSHING IN BOX

LIP SEAL IN BOX

DURCO MARK II
IN-LINE

DRIVER DATA

MOTOR ☒ TURB. ☐ OTHER

HP RPM 40.0

1150

FRAME 324T

TYPE TEFC

PH HZ VOLTS 3/60/450

MFR. Reliance

SPECIAL XT (chem.duty)


TAG OR MARK

FURN. BY CUST. ☐ MTD. BY CUST. ☐DURCO ☒DURCO ☒

RECEIVED


22 26 86

VELSICOL CHEMICAL CORP.
CORPORATE ENGINEERINGGENUINE DURCO PARTS
QUALITY - AVAILABILITY - VALUE

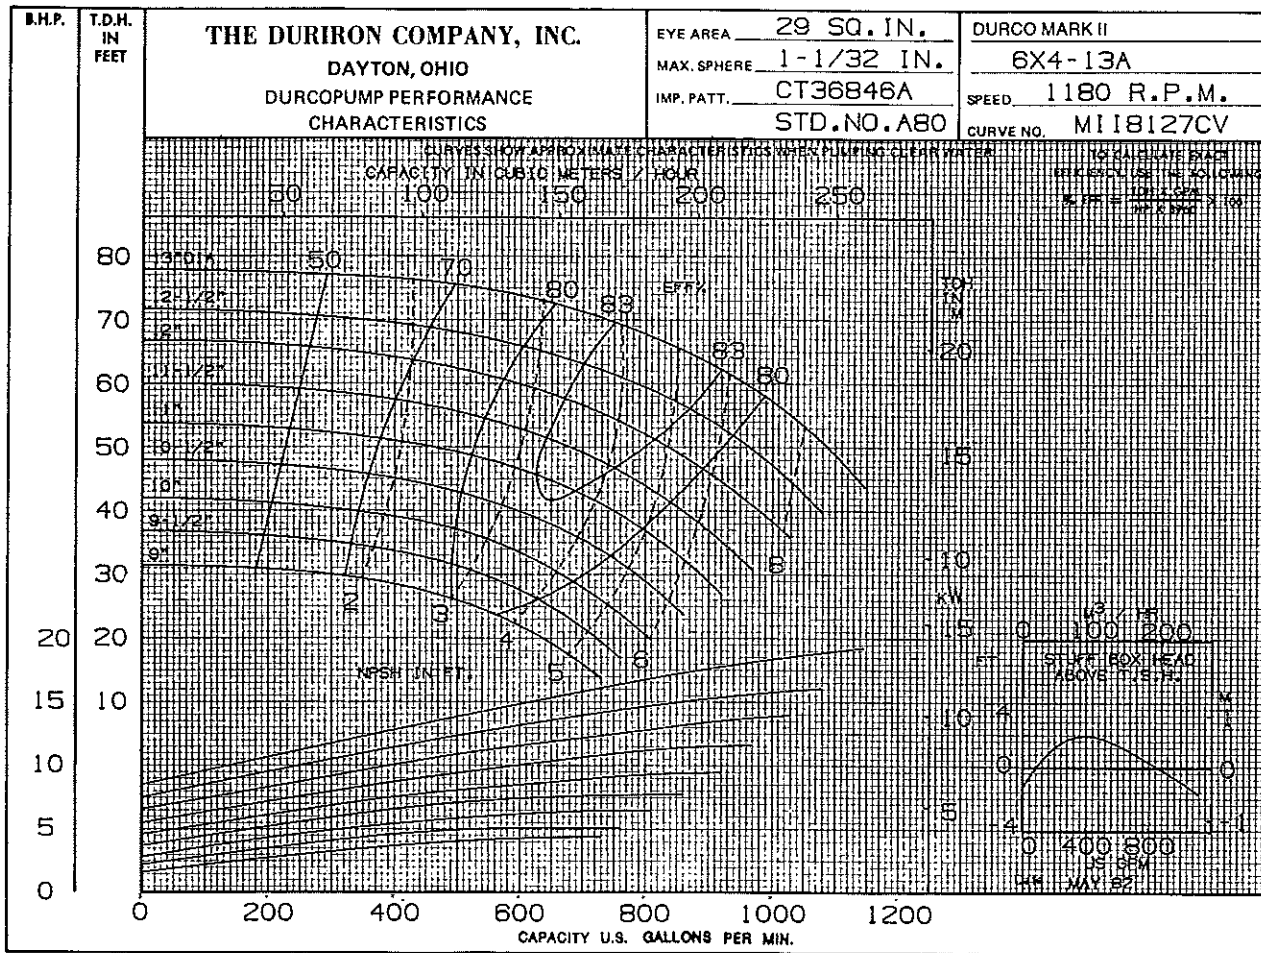

Form No. 62-2561

MA-830 A/B/C

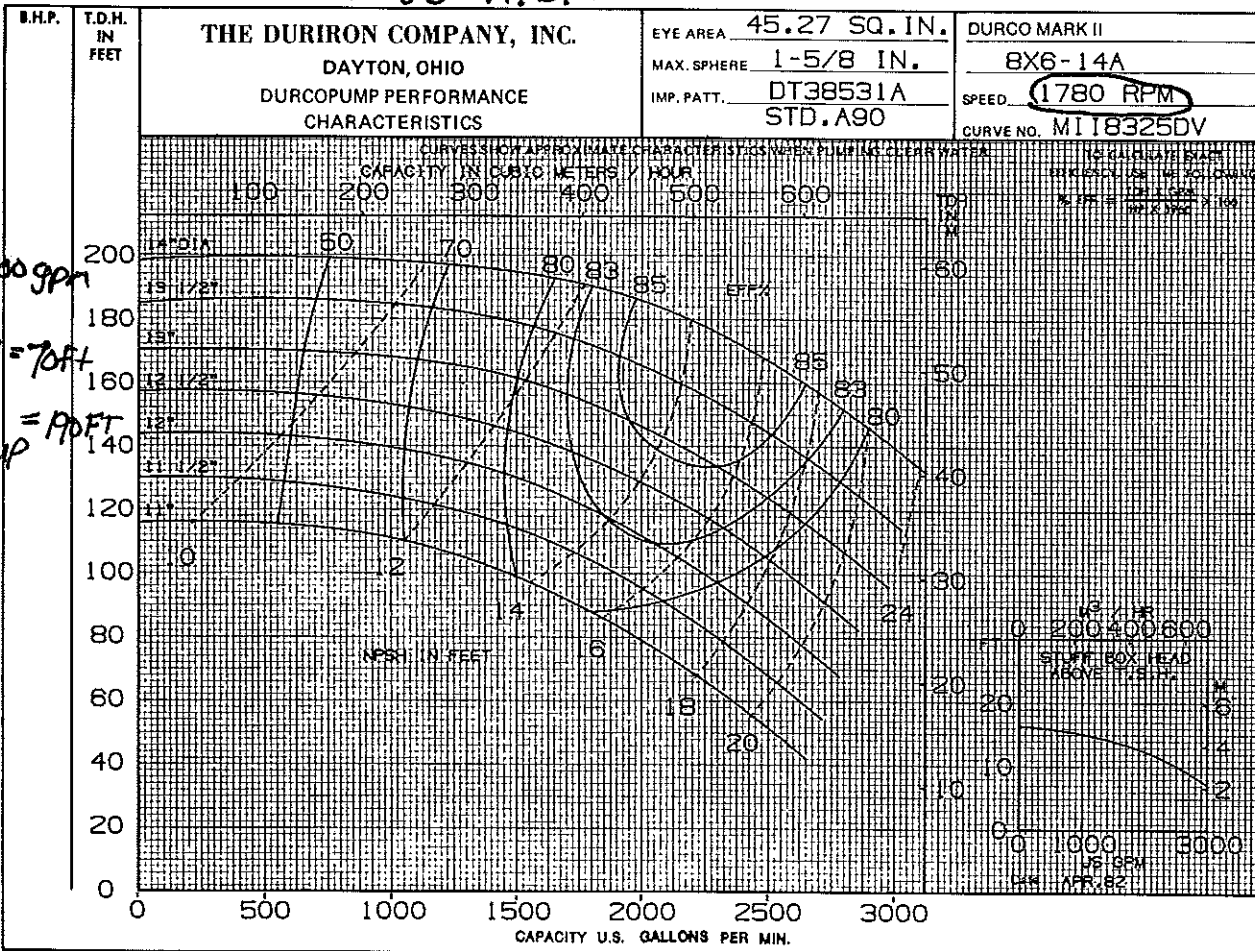

Flow 1500 gpm
TDH
Data Sheet = 70 ft
Actual
13 3/4" IMP = 190 ft

Form No. 62-2561