




# RINO-K&K COMPRESSION CYLINDER DATA SHEET

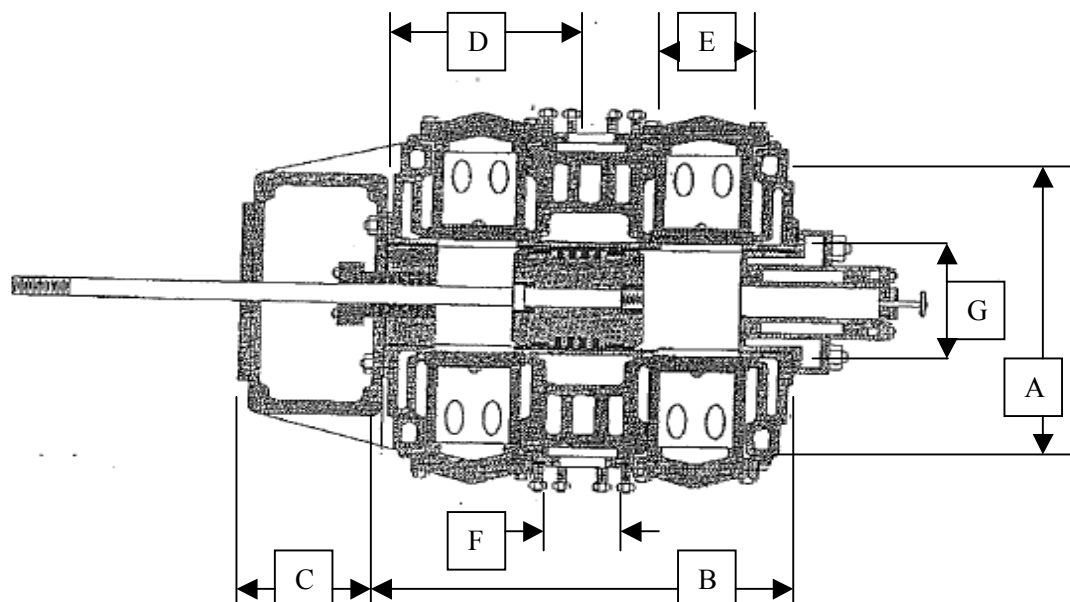

MAKE	IR
TYPE / CLASS	HHE
BORE	30"
STROKE	15"
IS CYLINDER LINED	
LINER THICKNESS	
No. OF VALVES	12
PISTON ROD SIZE	

CASTING # OF CYLINDER	E5D8B
SERIAL NUMBER	X6X11291
WORKING PRESSURE	145
MAX. ALLOWABLE H2O PRESSURE	75
HYDRO TEST PRESSURE	320
TYPE OF OUTER HEAD	N/A
AIR / WATER COOLED	WATER

TYPE & SIZE OF VALVES	MLH43477CG2/ MLH43950CG2
-----------------------	--------------------------

A	DISTANCE BETWEEN SUCTION & DISCHARGE FLANGE	54-7/8"
B	LENGTH OF BODY TO FACE	60-1/2"
C	LENGTH OF DISTANCE PIECE	21-3/4"
D	DISTANCE FROM CENTER OF SUCTION & DISCHARGE FLANGE TO END CYLINDER	36"
E	BOLT CIRCLE, VALVE CAP No. & SIZE OF BOLTS	(8) 3/4" ON A 14.75" BOLT CIRCLE
F	SUCTION & DISCHARGE FLANGE SIZE No. & SIZE,	(30) 3/4" ON A 3" BOLT TO BOLT
G	OUTER HEAD BOLT CIRCLE, No. & SIZE OF BOLTS	(20) 1" ON A 37-1/8" BOLT CIRCLE