

B.H.P.

T.D.H.
IN
FEET**THE DURIRON COMPANY, INC.**


DAYTON, OHIO

DURCOPUMP PERFORMANCE
CHARACTERISTICSEYE AREA 6.70 SQ IN
MAX. SPHERE 1/2 IN
IMP. PATT. CT-22821A
STD NO.-A50**DURCO MARK II**
3X1½-10
SPEED 1150 R.P.M
CURVE NO. M II 7704AV

CURVES SHOW APPROXIMATE CHARACTERISTICS WHEN PUMPING CLEAR WATER

TO CALCULATE EXACT
EFFICIENCY, USE THE
FOLLOWING:

$$\% \text{ EFF.} = \frac{\text{TDH} \times \text{GPM}}{\text{HP} \times 3960} \times 100$$

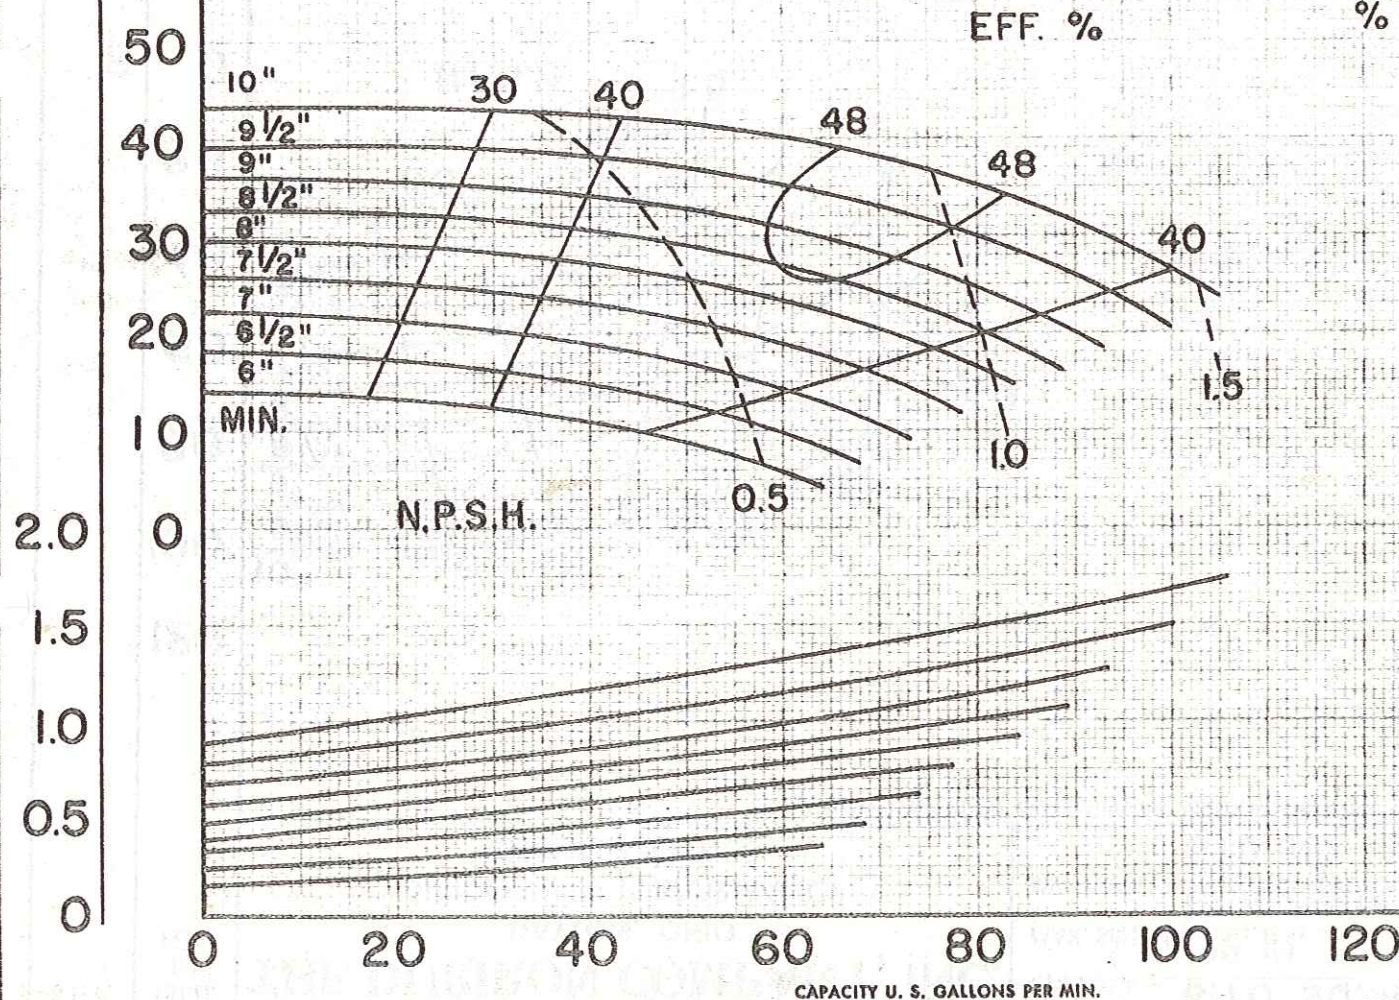

CAPACITY U. S. GALLONS PER MIN.

12/65